


RENOLIT ALKORPLUS₈₁₁₀₃

Peel stop bar



PRODUCT DESCRIPTION

- Folded profile in galvanized steel for mechanical fixation of **RENOLIT** single ply membranes and perimeter fixations.
- The profile is pre-punched with holes $\varnothing 4.85$ mm, $\varnothing 6.5$ mm, $\varnothing 8.3$ mm and $\varnothing 15.0$ mm.




CHARACTERISTICS

Coating	Aluzinc	Mass unit per area	0.5 kg / m
Width	30 mm	Corrosion resistance	15 cycles Kesternich test in accordance with DIN 50018
Thickness	1 mm		

PACKAGING

Peel stop bar	Length	Diameter	Spacing	Packaging unit
RENOLIT ALKORPLUS 81103-002	2250 mm	4.85 mm/ 6.5 mm/ 8.3 mm/ 15 mm (*) (alternating)	83.33 mm	10 pces

(*) 15 mm: compatible with appropriate washers, contact **RENOLIT** for more information.

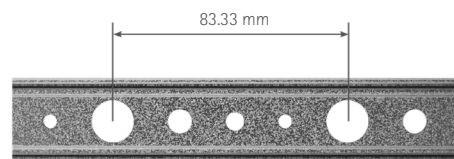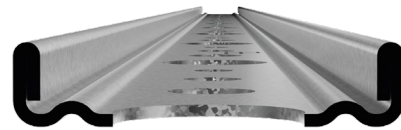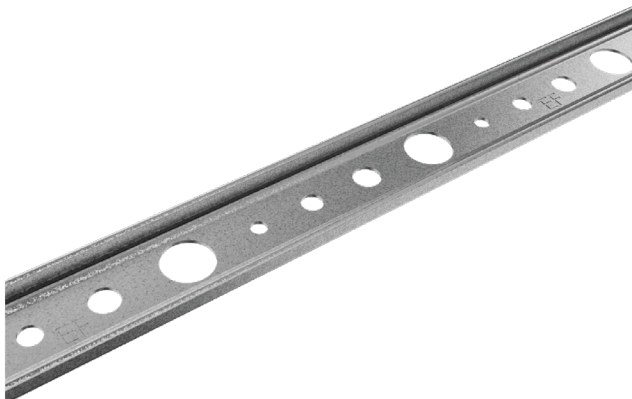

This document replaces and supersedes all prior versions.

WWW.RENOLIT.ALKORPLAN.COM

RENOLIT RENOLIT Cramlington Ltd, Station Road - Cramlington, Northumberland NE23 8AQ - United Kingdom
T +44 1670 718283 - F +44 1670 590096 - renolit.cramlington@renolit.com

RENOLIT Belgium N.V. - Export Dpt. - Industriepark De Bruwaan 43 - 9700 Oudenaarde - Belgium
T +32 (0)55 33 98 51 - renolit.belgium@renolit.com



Rely on it.