


RENOLIT ALKORTOP⁸¹⁷⁶⁰

Metal sheet

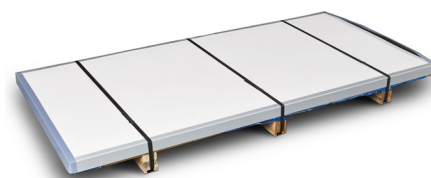

PRODUCT DESCRIPTION

Galvanised metal sheet 0.6 mm thick with a 0.80 mm unreinforced **RENOLIT ALKORTOP** roof waterproofing membrane of flexible polyolefins (FPO/TPO) laminated to the surface. The bottom of the metal sheet is treated with an anti-corrosion coating.

FIELD OF APPLICATION

Specifically designed as an accessory for **RENOLIT ALKORTOP** roofing systems. It is used to make profiles for linear edge restraint, intermediate support on unbonded upstands over 500mm high, roof drip edges, metal capping, etc.
The metal sheet can be cut and shaped either on site or in a metal workshop. Installation according to the **RENOLIT** installation instructions.

PACKAGING

Type	Colour	Dimensions	Weight	Pieces / Pallet
RENOLIT ALKORTOP ⁸¹⁷⁶⁰⁻⁰⁰³	White	1 m x 2 m	5.8 kg/m ²	30

STORAGE

Store in the original packing, in a dry and frost-free area protected from direct sunlight.

This document replaces and supersedes all prior versions.

WWW.RENOLIT.ALKORPLAN.COM

RENOLIT UK Ltd, Station Road - Cramlington, Northumberland NE23 8AQ - United Kingdom
T +44 1670 718283 - F +44 1670 719367 - renolit.cramlington@renolit.com

RENOLIT Belgium N.V. - Export Dpt. - Industriepark De Bruwaan 43 - 9700 Oudenaarde - Belgium
T +32 (0)55 33 98 51 - renolit.belgium@renolit.com



RZ760EX0125

Rely on it.