


# RENOLIT ALKORPLAN A Colour

## Adhered system

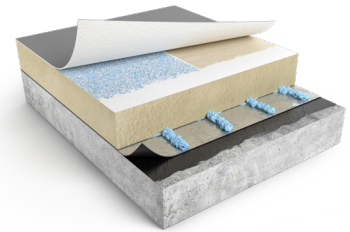

### Product information

**RENOLIT ALKORPLAN A Colour**  
Laminated fleece-backed roofing membrane of flexible PVC with a woven polyester reinforcement. Available in different colours.

### Application

**RENOLIT ALKORPLAN A Colour** is used as a waterproofing membrane within fully bonded systems with the **RENOLIT ALKORPLUS PU** adhesives.

### Certificates

Product certification EN 13956  
0749-CPR-BC2-320-01452-0001-01

Certificates available on our website  
[www.renolit.alkorplan.com](http://www.renolit.alkorplan.com)

PRODUCT DATA			
	Method	Production values RENOLIT ALKORPLAN A Colour	Unit
		1.5 mm	
Mass per unit area	EN 1849-2	2.15	kg/m <sup>2</sup>
Tensile strength	EN 12311-2 (A)	≥ 1100	N/50 mm
Elongation	EN 12311-2 (A)	≥ 16	%
Dimensional stability (6h at 80 °C)	EN 1107-2	≤  0.3	%
Cold crack temperature	EN 495-5	≤ -25	°C
Nail tear resistance	EN 12310-1	≥ 625	N
Tear resistance	EN 12310-2	≥ 350	N
Joint peel resistance	EN 12316-2	BOJ or ≥ 225	N/50 mm
Water vapour diffusion resistance (μ)	EN 1931	20,000	-
Resistance to static perforation	EN 12730	≥ 20	kg
External fire performance (EN 13501-5)	CEN/TS 1187	B <sub>roof</sub> (t1) as a part of a roof system*	-
Reaction to fire (EN 13501-1)	ISO 11925-2	E	-

\* Contact **RENOLIT ALKORPLAN** for certification.

PACKAGING					
	Colour	Thickness	Width	Roll length	Roll weight
RENOLIT ALKORPLAN A <sub>35F79</sub>	Lead grey (73321)	1.5 mm (3.5 mm incl. fleece)	2.10 m	15 lm	ca. 74 kg
	Charcoal (79851)	1.5 mm (3.5 mm incl. fleece)	2.10 m	15 lm	ca. 74 kg
	Copper Green (60884)	1.5 mm (3.5 mm incl. fleece)	2.10 m	15 lm	ca. 74 kg
	Terracotta (82119)	1.5 mm (3.5 mm incl. fleece)	2.10 m	15 lm	ca. 74 kg

Other colours available on request.

### Storage

The rolls should be stored horizontally and parallel to each other. Store in the original packaging, in a dry and frost-free area, protected from direct sunlight. The maximum stack height in the original packaging is 5 open crates.

The **RENOLIT ALKORPLAN** roofing membranes are supplied in rolls on cardboard cores. Every delivery may contain up to 10% of short rolls (minimum length: 8 m).

*This document replaces and supersedes all prior versions.*

**WWW.RENOLIT.ALKORPLAN.COM**

RENOLIT Belgium N.V. - Export Dpt. - Industriepark De Bruwaan 43 - 9700 Oudenaarde - Belgium  
T +32 (0)55 33 98 51 - F +32 (0)55 31 86 58 - [renolit.belgium@renolit.com](mailto:renolit.belgium@renolit.com)



*Rely on it.*